

# KTX

Transmitter Module



# KRX

Receiver Module

English

### Instructions for KTX / KRX:

- I. KTX / KRX: press power switch and an "8" will display.
- A: Power on: Long press for 1-2 seconds till the indicator light up.
- B: Channel switch: Short press the button.
- C: Power off: Short press the button till the "8" shows on the display then long press for 1-2 seconds till the indicator light off.
- D: The "8" display: The "8" will disappear until entering power save mode.

Indicator: KTX: When AC works, the indicator will light green. When battery is available, it will indicate low voltage and indicator will light red. Using external USB power supply, the "8" display flashing 3 times then light off. KRX: When AC works, the indicator will light green and when it receive RF sign a~ the green light is still on. Using external USB power supply, the "8" display flashing 3 times then light off.

Note: Do not need to pair and it can be used by setting at same channel. KRX can receive multi-branch (same as simulative UHF) which means one-to-many, as long as KTX is not at the same frequency.


### Instrucciones de uso de KTX/KRX:

- I - Presione el botón de encendido hasta que el número "8" aparezca en la pantalla.
- A. Encendido: Presione durante 1 - 2 segundos hasta que la luz indicadora se ilumine.
- B. Cambio de canal: Presione el botón rápidamente y la pantalla mostrará el canal.
- C. Apagado: Presione rápidamente hasta que en la pantalla aparezca el número "8" entonces mantenga presionado el botón por 1-2 segundos hasta que se apague en la pantalla.
- D. El número "8" en la pantalla: Este número podría desaparecer cuando se pase al modo de ahorro de energía.

Indicador: KTX: Cuando la unidad se trabaja en AC, el indicador estará de color verde. Cuando la unidad trabaje con batería y esta se encuentre baja de carga, el indicador se iluminará de color rojo. Cuando se utiliza una fuente externa por medio del puerto USB, el número "8" en la pantalla parpadeará 3 veces y entonces se apagará. KRX: Cuando la unidad trabaje con el AC, el indicador se iluminará de color verde y al recibir señal RF el mismo se mantendrá iluminado también. Cuando se utiliza una fuente externa por medio del puerto USB, el número "8" en la pantalla parpadeará 3 veces y entonces se apagará.

Nota: Estas unidades no necesitan ser pareadas y podrán ser utilizadas en el mismo canal. El KRX puede recibir múltiples bancos (igual como simultáneas señales UHF), lo cual significa uno para muchos, siempre y cuando el KTX no esté en la misma frecuencia.

Spanish

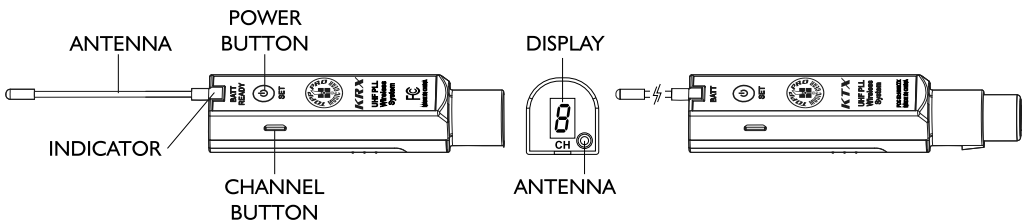

Model	KRX
Channel	Multi-Channel, up to 16 frequency presets for each frequency bands
Frequency band	UHF 470-960MHz. Dependent on applicable country regulations
Receiver Type	PLL UHF SYNTHESIZED
Frequency response	30Hz-17KHZ (±3dB)
Frequency stability	±0,005% (-10 - 50)
T.H.D	1KHz<0,3%
Modulation Mode	FM (F3E)
Signal to Noise	>98dB
R/F sensitivity	-100dBm / 12dB SINAD
Balance output	Max 8dBu/±50KHz
Power supply	AA(LR6) 1.5V
Dimensions(LxWxH)	114x22x23mm

Model	KTX
Oscillation mode	PLL UHF SYNTHESIZED
Frequency band	UHF 470-960MHz. Dependent on applicable country regulations
Frequency response	30Hz-17KHZ (±3dB)
Frequency stability	±0,005% (-10 - 50)
T.H.D	1KHz<0,3%
Modulation mode	FM (F3E)
Dynamic	> 100dB
R/F output power	10mW
Max. Deviation	50KHz
Power supply	AA(LR6) 1.5V

FCC ID:H38KTX  
Made in China



N80828-1.0