


LUNAPRBATTU/DY

10W Battery Powered Ellipsoidal LED

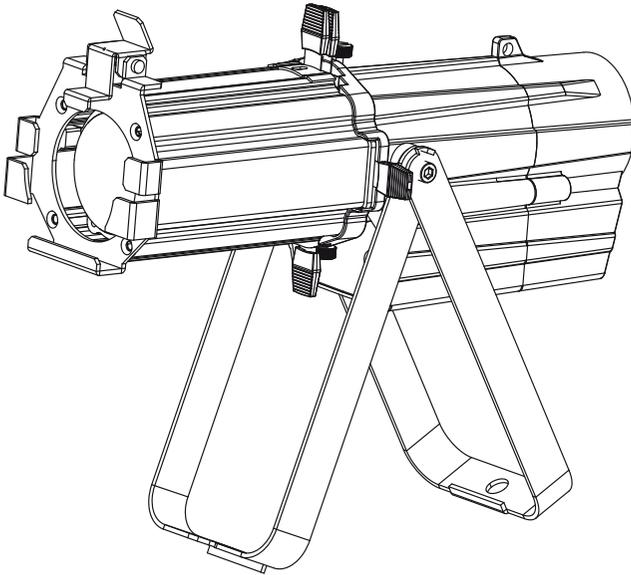

User Manual

1 PRODUCT SPECIFICATIONS

1.1 PRODUCT SPECIFICATIONS

- ◆ Voltage: 24VDC
- ◆ Max Power: 10W
- ◆ Size: 341x130x133mm
- ◆ Weight: 1.7kg
- ◆ Charging: 5h
- ◆ Discharging: 5h at full output

1.2 SAFETY WARNING

IMPORTANT

[ALWAYS READ THE USER MANUAL BEFORE OPERATION.]
[PLEASE CONFIRM THAT THE POWER SUPPLY STATED ON THE PRODUCT IS THE SAME AS THE MAINS POWER SUPPLY IN YOUR AREA.]

- This product must be installed by a qualified professional.
- Always operate the equipment as described in the user manual.
- A minimum distance of 0.5m must be maintained between the equipment and combustible surface.
- The product must always be placed in a well ventilated area.
- Always make sure that the equipment is installed securely.
- DO NOT stand close to the equipment and stare directly into the LED light source.
- Always disconnect the power supply before attempting maintenance.
- Always make sure that the supporting structure is solid and can support the combined weight of the products.
- The earth wire must always be connected to the ground.
- Do not touch the power cables if your hands are wet.

ATTENTION


- Do not operate in a sealed enclosure with insufficient air flow
- Do not operate in an environment with temperatures in excess of 45deg. C.
- Do not operate/store in close proximity to source of fire.
- Always charge with supplied charger
- Do not charge for more than 24 hours
- Always turn off battery storage switch when storing for longer than 7 days
- Always store with full load
- Always charge with flightcase open
- Always carry out one full discharge and charge cycle every 3 months
- Always store in a dry environment away from direct sunlight

2 INSTALLATION

2.1 MOUNTING


HANGING

The fixture can be mounted in a hanging position using the supporting bracket. The bracket should be secured to the mounting truss or structure using a standard mounting clamp. Please note that when hanging the unit a safety cable should also be used.

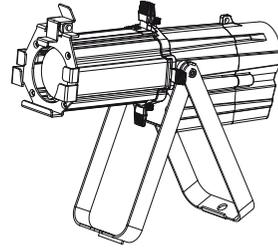

UPRIGHT

The fixture can be mounted in an upright or sitting position using the supporting brackets.

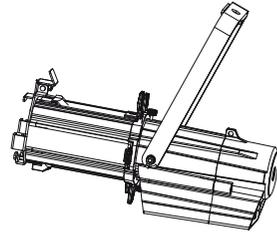


NOTE

The LED MODULE can be mounted at any angle and in any position. It is possible to further adjust the angle of the LED MODULE using the two adjustment knobs located on the side of the fixture.

PLACE THE TRIPOD:


- ◆ HANGING FIXTURE FIRST, AND THEN FIX IT TO TRIPOD WITH M10 STAINLESS STEEL SCREWS, ANGLE IS ADJUSTABLE, SHOWN AS PICTURE 2.1-3

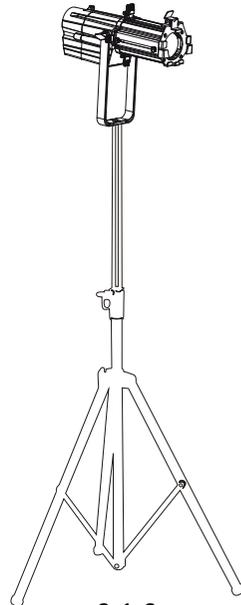


2.1-3

3 OPERATION


3.1 INSTRUCTION FOR SWITCH

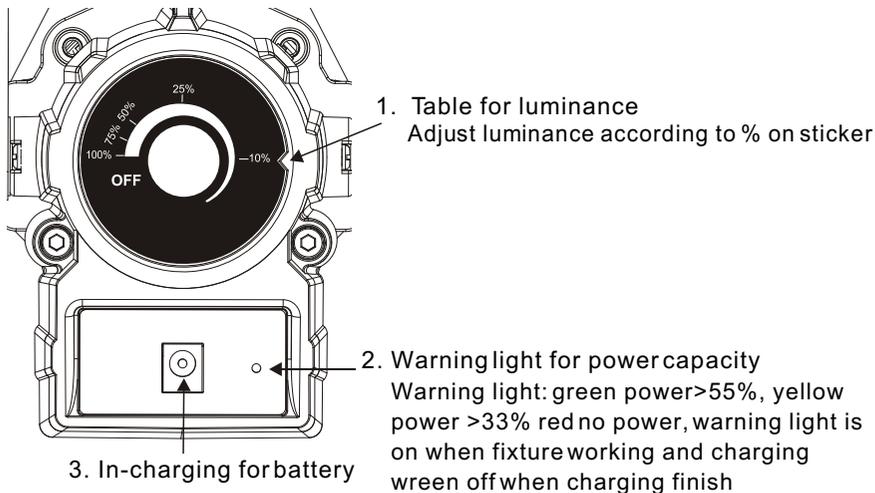

3.2 OPERATION FOR ZOOM AND FOCUS

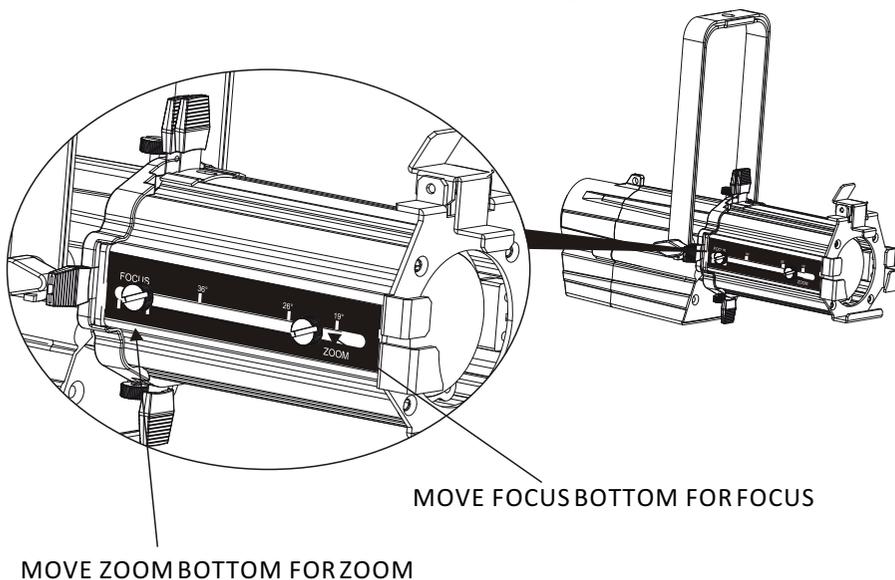

3.3 INSTALLATION FOR GEL FRAME HOLDER AND GOBO HOLDER

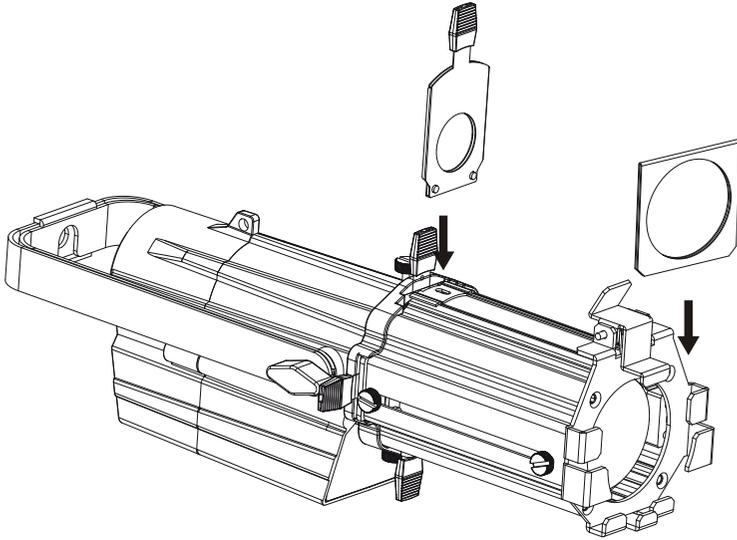


INSERT GOBO HOLDER AND GEL FRAME HOLDER INTO THE GAP SHOWN AT ABOVE PICTURE

4 BATTERY CHARGING


4.1 FLIGHTCASE SPECIFICATIONS

Voltage: AC100-240V, 50,60Hz
Rated Power: 150W
Weight: 8.5KG
Dimensions: 672x412x129mm


4.2 FLIGHTCASE WITH CHARGER

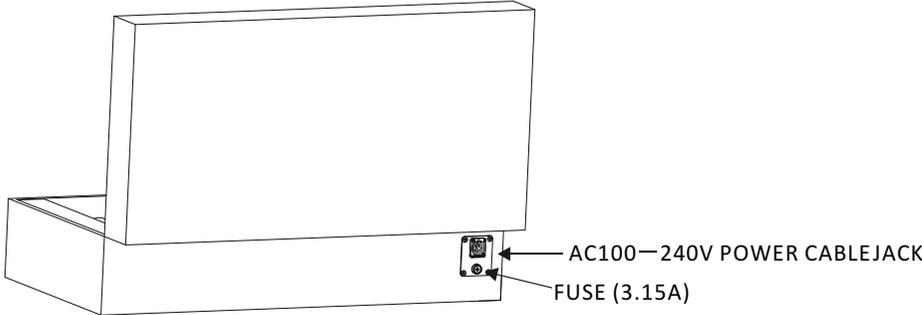

PHYSICAL MAP FOR CHARGING SUITCASE

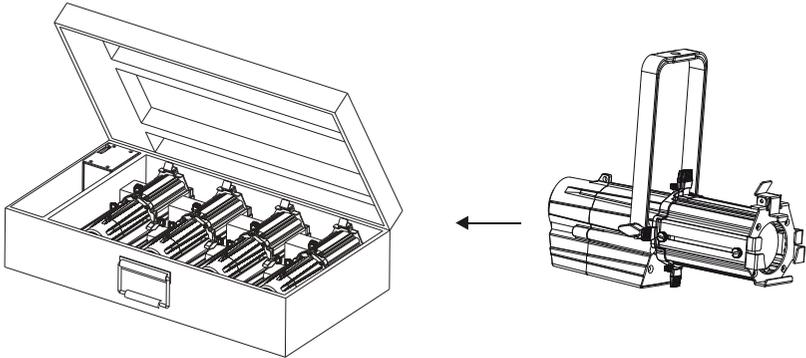


4.3 CHARGER SPECIFICATIONS (WITH CARTONS)

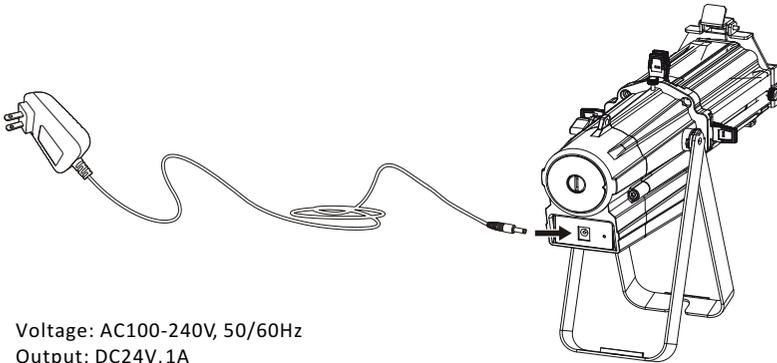

Voltage: AC100-240V, 50/60Hz
Output: DC24V, 1A
LED: $\leq 200\text{mA}$

4.4: THE FLIGHTCASE MUST HAVE THE HOOD OPEN WHEN CHARGING.

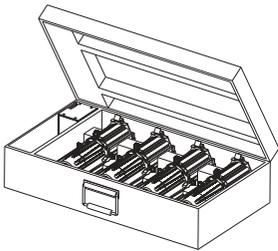

CHARGING SUITCASE
(P20140)



WITH TRIPOD SUITCASE
(P20143)

4.5 IMPORTANT FACTS:

HOW TO CARE FOR YOUR BATTERY!

CHARGING

DO NOT CHARGE FOR MORE THAN 24 HRS
RECHARGE WITHIN 3 DAYS OF USE
CHARGE WITH FLIGHTCASE OPEN

STORING

STORE WITH FULL LOAD
TURN OFF AT BASE WHEN STORING FOR MORE THAN 7 DAYS
STORE IN AN UPRIGHT POSITION