




## 4Bar LTBT

4Bar LTBT is a convenient pack-n-go system that, not only sets up and tears down in seconds, but is now easier than ever to control. On-board Bluetooth® wireless technology means you can create and control dynamic lighting looks directly from a smartphone or tablet, without any additional hardware, using the free [BTAir](#) app. If that weren't convenient enough, 4Bar LTBT also has D-Fi USB compatibility for wireless Master/Slave and DMX control. You can achieve total room or stage coverage with four individually adjustable heads, and you can create even larger coordinated light shows with other 4BAR fixtures in master/slave mode. Easily control static colors and automated programs with the optional [IRC-6](#) remote or use built-in sound-activated programs.

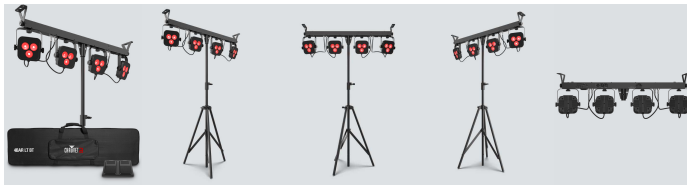

Locate a Demo Near You! [Germany](#) | [France](#) | [United Kingdom](#) | [Europe](#) | [Benelux](#)

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Chauvet & Sons, LLC is under license. Other trademarks and trade names are those of their respective owners.

# Highlights

- Complete wash lighting solution with built-in Bluetooth® wireless technology
- Control directly from a smart phone or tablet without any additional hardware
- D-Fi USB compatibility for wireless master/slave or DMX control
- Easily set up and tear down in seconds with the included tripod, carry bags and footswitch
- Create large, coordinated light shows with other 4BAR fixtures in master/slave mode
- Achieve total room or stage coverage with 4 individually adjustable heads
- Easily control static colors and automated programs with the optional [IRC-6](#) remote
- Sound-activated programs dance to the beat of the music

## Specifications

- DMX Channels: 3, 5 or 15
- DMX Connectors: 3-pin XLR
- Max Unobstructed Distance: 150 ft (45.7 m)
- Light Source: 12 LEDs (tri-color RGB) 3 W, 1 A, 50,000 hours life expectancy
- Strobe Rate: 0 to 22 Hz
- PWM Frequency: 1.3kHz
- Beam Angle: 12°
- Field Angle: 21°
- Operating Frequency: 2.4 GHz
- Fits Tripod Size: 1 in (25.4 mm)
- Illuminance: 2,382 lux @ 2 m (per pod)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 47 W, 0.7 A @ 120 V, 60 Hz  
45 W, 0.4 A @ 230 V, 50 Hz
- Weight: 7.8 lb (3.5 kg)
- Size: 36.1 x 3.7 x 10.8 in (918.1 x 95 x 274.3 mm)
- Approvals: CE
- Optional Controllers: IRC-6, D-Fi USB
- Stand Height: 50-83 in (127-211 cm)
- Bluetooth Version: 4.2

## What's Included

- 4BAR LT BT
- Power cord
- Carrying bag
- Tripod
- Footswitch
- Hanging brackets