


# GigBAR Move ILS

- 5-in-1 lighting system that includes moving heads, derbies, washes, a laser and strobe effect pre-mounted on a single bar
- Built-in D-Fi transceiver means complete Integrated Lighting System (ILS) compatibility including wireless control of other ILS products
- Separate color and gobo wheels in moving heads allow for creative programming
- Totem Mode keeps the moving heads focused on the dance floor
- System includes a tripod, wireless footswitch, RF remote and carry bags to ensure quick setup
- Built-in UV LEDs illuminate florescent objects and make them pop
- Individual control of each effect ensures your show looks the way you need it to
- Easy control via stand-alone, DMX, wireless RF remote or wireless footswitch

## Specifications

- DMX Channels: 3, 27 or 46
- DMX Connectors: 3- pin XLR
- Pan and Tilt: 540°/180°
- Colors (moving head): 7 + white, continuous scroll at variable speeds
- Gobos (moving head): 7 + open, continuous scroll at variable speeds
- Light Source (pars): 3 LEDs (quad-color RGB+UV) 3.5 W (1 A)
- Light Source (strobe): 4 LEDs (white & UV) 5 W (1 A)
- Light Source (derby): 6 LEDs (2 red, 2 green, 2 blue) 5 W (1.6 A)
- Light Source (moving head): 1 LED (cool white) 10 W (2.3 A)
- Light Source (laser): 650nm/100 mW (red) laser diode, 532 nm/30 mW (green) laser diode
- Strobe Rate (all effects): 0 to 20 Hz
- Stand Height: 4.8 ft to 8.3 ft (1.5 to 2.5 m)
- Beam Angle (moving head): 11°
- Beam Angle (pars): 19°
- Beam Angle (strobe): 8°
- Coverage Angle (derby): 131°
- Coverage Angle (laser): 93°
- Foot Switch Operating Frequency: 433 MHz
- Foot Switch Max Unobstructed Distance: 100 ft (30.5 m)
- Illuminance (pars): 1,205 lux @ 2 m (per par)
- Illuminance (moving head): 1056 lux @ 2 m (per head)
- Illuminance (strobe): 86 lux @ 2 m (per LED)
- Power Linking: 7 units @ 120 V; 12 units @ 230 V
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 81 W, 1.1 A @ 120 V, 60 Hz
- Power and Current: 79 W, 0.6 A @ 230 V, 50 Hz
- Complies with FDA performance standards for laser products except for deviations pursuant to Laser Notice No. 56, dated May 8, 2019
- Approvals: CE, RoHS, UKCA, FDA, FCC

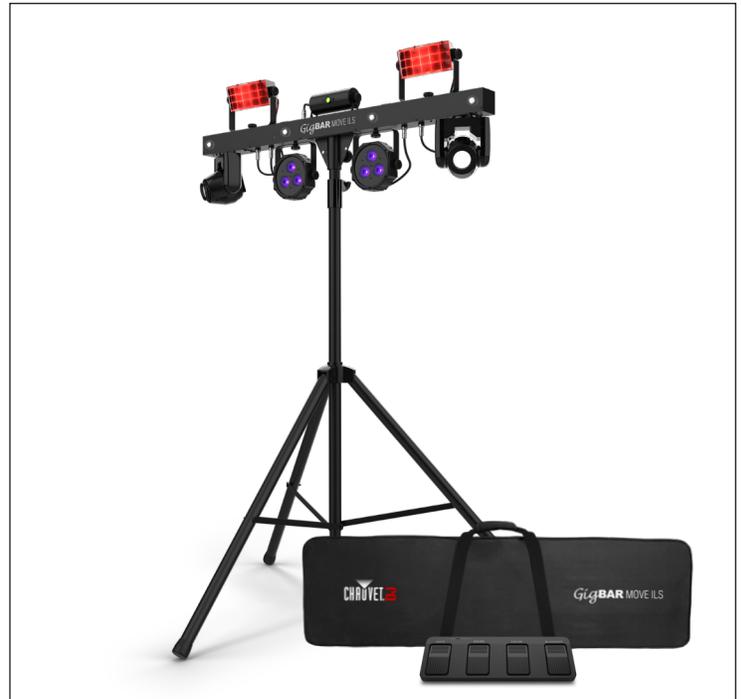

- Weight: 23.4 lb (10.7 kg)
- Size: 43 x 5.7 x 17.7 in (1100 x 144 x 449 mm)
- Included Controllers: RF remote, wireless footswitch

