


LUNAPRBATTU/DY



10W BATTERY POWERED ELLIPSODIAL LED

LUNA.PRBATTU/DY WARM WHITE / COLD WHITE is a battery-powered mini ellipsoidal. It is powered by a high performance lithium battery, with intelligent output level options, without the need for power/DMX cables. It is the perfect lighting tool for temporary exhibitions, shows, banquets, etc.

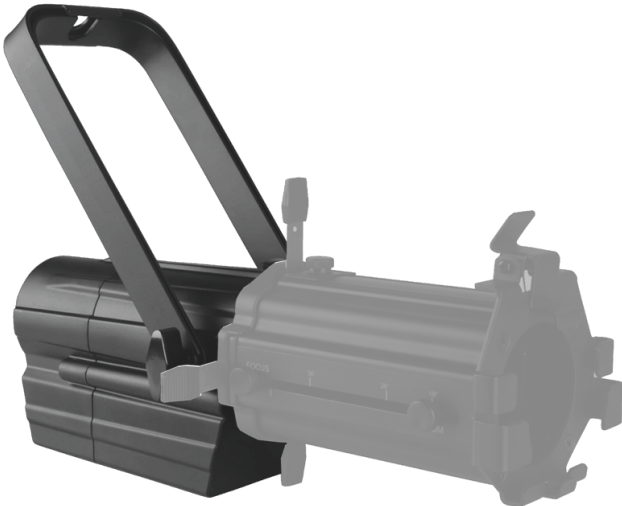

LED Source



3200K (TU)
5600K (DY)



Battery Powered



Optical Lens



Wireless DMX



Parameters and technical information

Light Source	10W LED
CCT	3200K
CRI	Ra≥90
CQS	>90
Angle	19°-36° (Manual control)
Voltage	100-240VAC, 50/60Hz
Power	13W
Drive Current	1A
Power Connection	Power in
Cable Power	13000mA
Run time	5-12hrs (depend on output level)
Charging Cycle	5hrs
Cooling	Direct Convection
Dimmer	Manual
Size	341 x 130 x 133 mm
Weight	1.7kg
Casing	Die-cast aluminum

Color	Black
Ambient Temp	0°C-45°C
IP Rated	IP20
Certification	CE, MET

Accessories



Flightcase
x4 units



Zoom Barrel
Lens 19° - 36°



Gelmedia
frame



Gobo holder



Glare shield



Charging
adaptor