



Example Schematic
HMXL66ARC

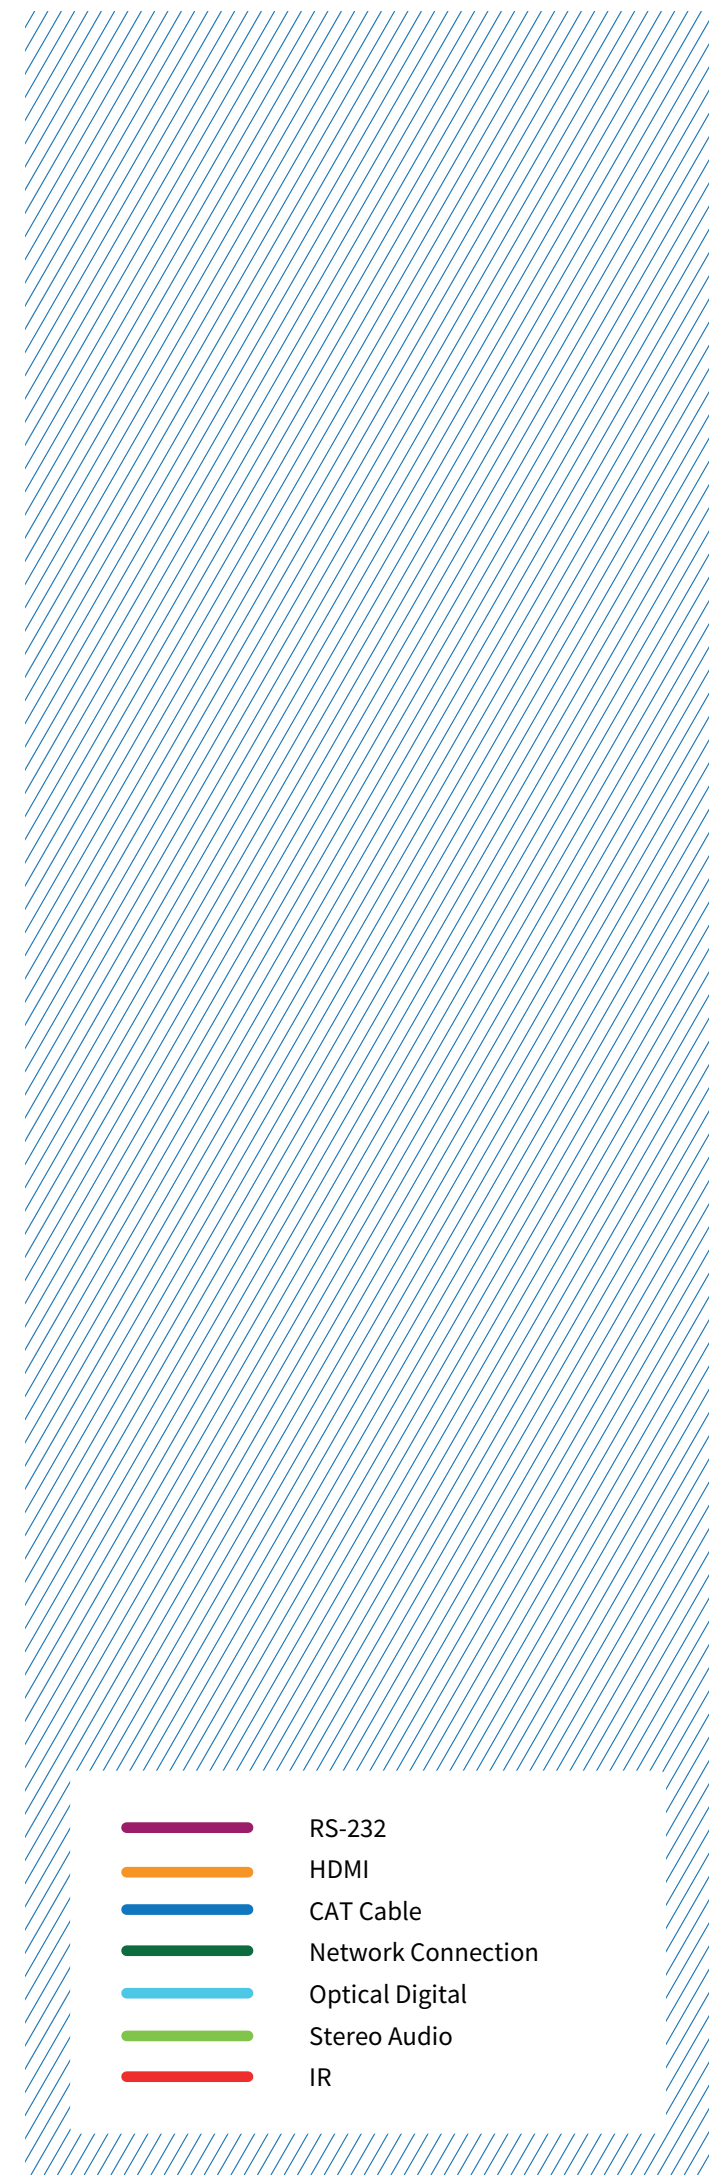

- RS-232
- HDMI
- CAT Cable
- Network Connection
- Optical Digital
- Stereo Audio
- IR

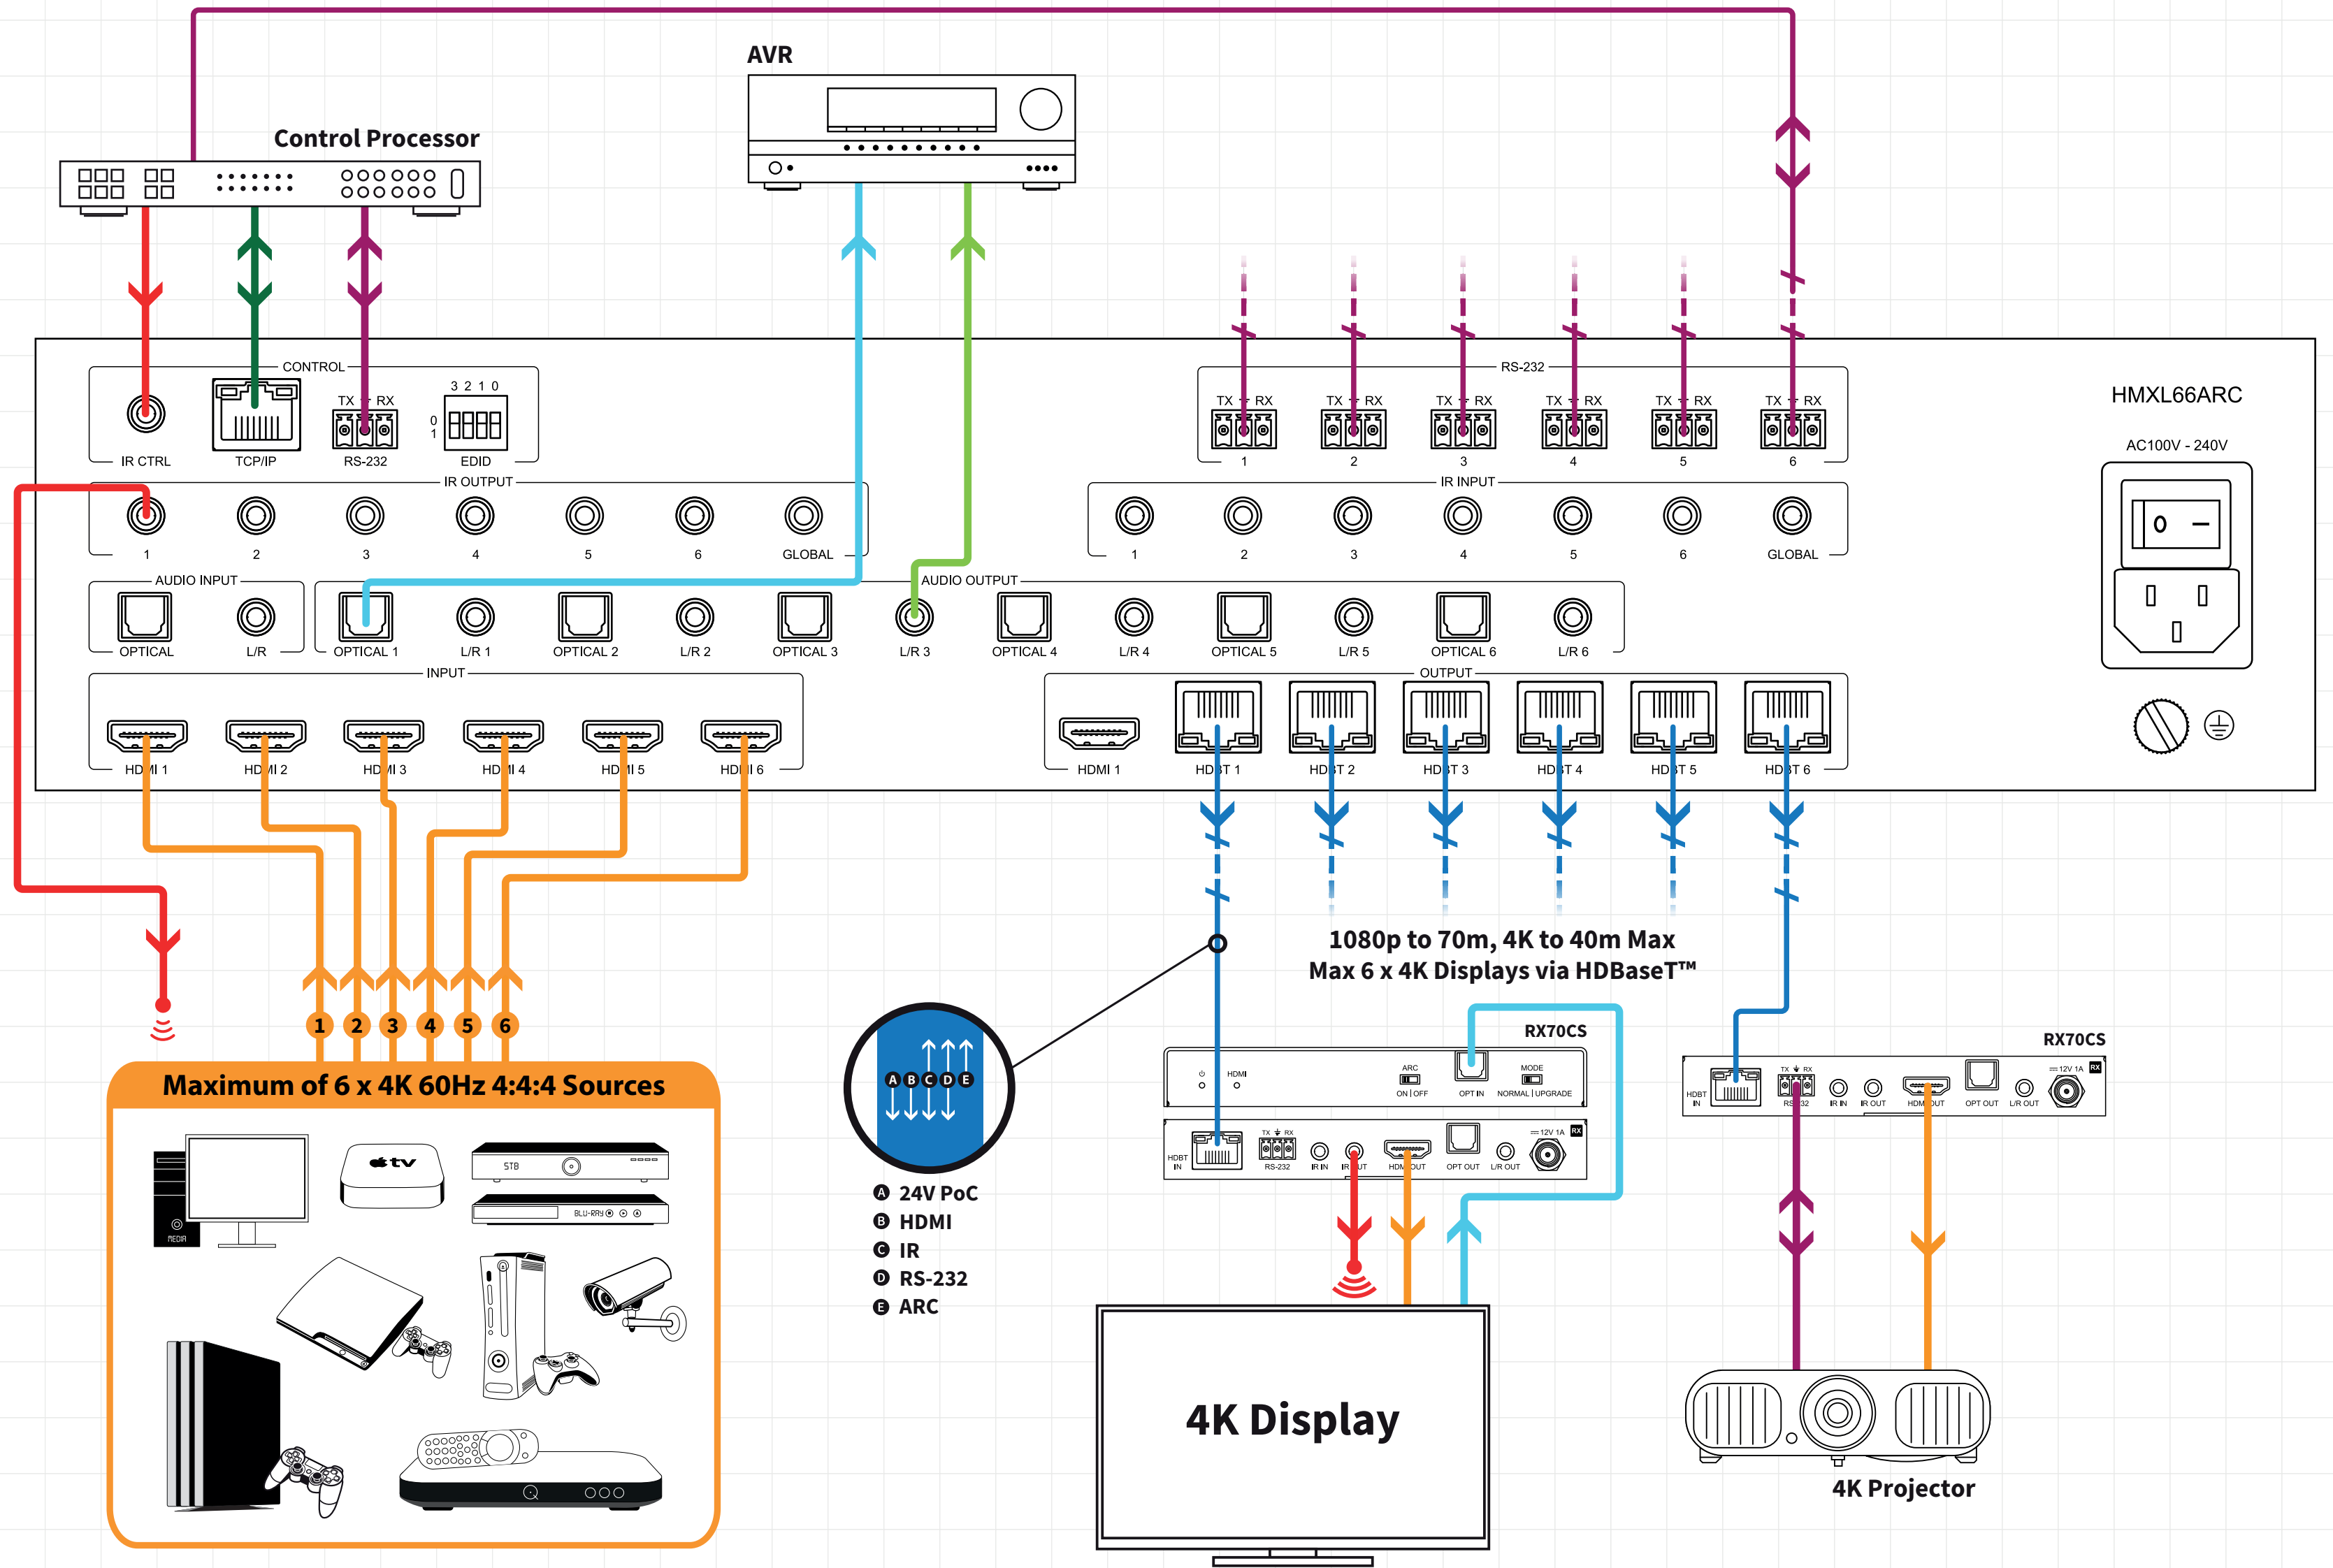

Maximum of 6 x 4K 60Hz 4:4:4 Sources

**1080p to 70m, 4K to 40m Max
Max 6 x 4K Displays via HDBaseT™**

- A** 24V PoC
- B** HDMI
- C** IR
- D** RS-232
- E** ARC

For 24V PoC, HDMI ARC and Optical Audio Return functionality, the RX70CS HDBaseT™ receiver must be used.