


4 x Input HDMI 2.0 Switcher

Description

Our SW41AB-V2 is a 4-Way HDMI switch with integrated audio breakout. The switch supports full HDMI 2.0 and HDCP 2.2 with video resolutions up to and including 4K @ 60Hz 4:4:4.

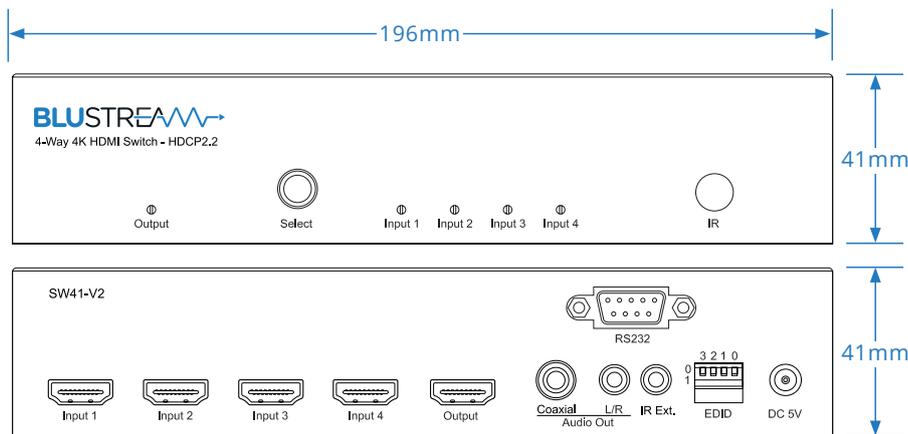

Key Features

- Features 4 x HDMI inputs which can be switched to a single HDMI output
- Auto-switching (HPD sensing) capabilities can be enabled / disabled
- Supports full HDMI 2.0 specification 4K UHD video (4K @60Hz 4:4:4)
- HDCP 2.2 compliant
- Supports 3D signal display
- Supports all industry standard video resolutions including VGA-WUXGA and 480i-4K
- Supports all known HDMI audio formats including Dolby TrueHD, Dolby Atmos, Dolby Digital Plus and DTS-HD Master Audio transmission
- HDMI audio breakout to analogue L/R audio and coaxial digital outputs concurrently
- Control via front panel, RS-232 and IR
- Advanced EDID management



Connectivity

- Video Input Connectors: 4 x HDMI Type A
- Video Output Connectors: 1 x HDMI Type A
- IR Input Ports: 1 x 3.5mm stereo Jack
- Audio Output Connectors: 1 x RCA (S/PDIF), 1 x Analogue audio L/R (3.5mm stereo Jack)
- RS-232 serial port: 1 x DB-9, female

Specifications

- Dimensions (W x D x H): 196mm x 94mm x 41mm
- Shipping Weight: 0.8kg
- Operating Temperature: 32°F to 104°F (0°C to 40°C)
- Storage Temperature: -4°F to 140°F (-20°C to 60°C)

Included Accessories

| | |
|--------------|--------------------------|
| IR Remote | 1 x SW41 Remote |
| Rack Mount | Mounting brackets |
| Power Supply | 5V/2A DC screw connector |

Control

| |
|----------------|
| RS-232 |
| Auto Switching |
| IR |
| Front Panel |

RS-232 Connectivity

| | |
|---------------|-------|
| Baud Rate: | 57600 |
| Data Bit: | 8-Bit |
| Parity: | None |
| Stop Bit: | 1-Bit |
| Flow Control: | None |

Regulatory Compliance



CAN ICES-3 (B)/NMB-3(B)