



WDMXT500MK2 WIRELESS SOLUTION

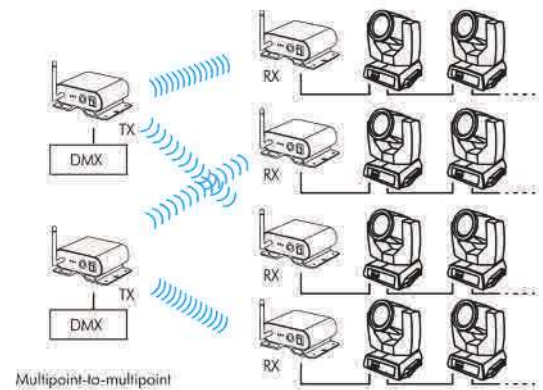

W-DMX TRANSCIEVER WIRELESS DMX

The WDMX T500 MK2 is an upgrade to the WDMX T500 transceiver. Supports DMX and RDM. Powered by Wireless Solutions G5, the wireless system transmits or receives secure and reliable DMX data without any delay or interference. Ideal for large-scale touring, mobile applications, and the rental market.

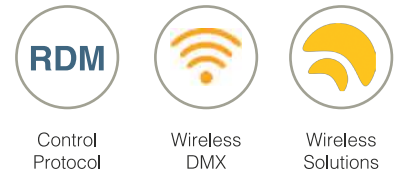

Parameters and technical information

| | | | |
|-------------------------|--------------------------------|--------------------|---------------------------------|
| Operation modes | Transmitter or Receiver | Antenna type | 5dBi |
| Wireless card | Original Wireless Solution G5 | Signal connector | 3pin or 5pin XLR In/Out |
| Frequency | 2.4 GHz,license free worldwide | Power connector | Powercon In |
| Modulation method | AFHSS | Working range | 500m (line-of-sight) |
| Control Protocol | W-DMX, RDM | IP rating | IP20 for indoor use only |
| Number of DMX ch. | 512 | Mounting | Truss mounting bracket included |
| Universes per device | 1 | Dimensions (LxWxH) | 145 x 100 x 57 mm |
| Universe in coexistence | 16 Max. | Weight | 1,2 kg |
| Compatibility | W-DMX G3 &G4S | Certification | CE |
| DMX Latency | <5 ms | | |